### RACKCABINET

#### FREE STANDING EASY SERIES CABINET

It is designed to enable all active and passive devices to be protected thanks to its aesthetic appearance, high quality design and manufacturing which will be used in server applications.



#### PRACTICAL AND ERGONOMIC

Design, all brands and models are manufactured with active and passive ventilation and traceability in every detail accessories that you can install active and passive devices.

The digital temperature sensor measures the temperature of the heat and Fan 1 and 2 enter the circuit at the specified temperature intervals.

At extremely high temperatures the Buzzer Alarm is switched on and the warning buzzer sounds.

• ERK 16U

• ERK 20U

• ERK 22U

• ERK 26U

• ERK 32U

• ERK 36U

• ERK 42U

- Temperature Sensor
- Digital Indicator
- Dual System Cooling Fan With 2 And 4
- Temperature Analysis
- Remote Access










## 19"RACK**CABINET EASY Series**

Free Standing Rack Cabinet

#### **EASY Series Network** cabinets.

Quality and value added in the most optimal way.

Parallel to the high performance and quality of its network applications, fully automatic industrial infrastructure and design create an unbelievable price index and offer the customer likes.

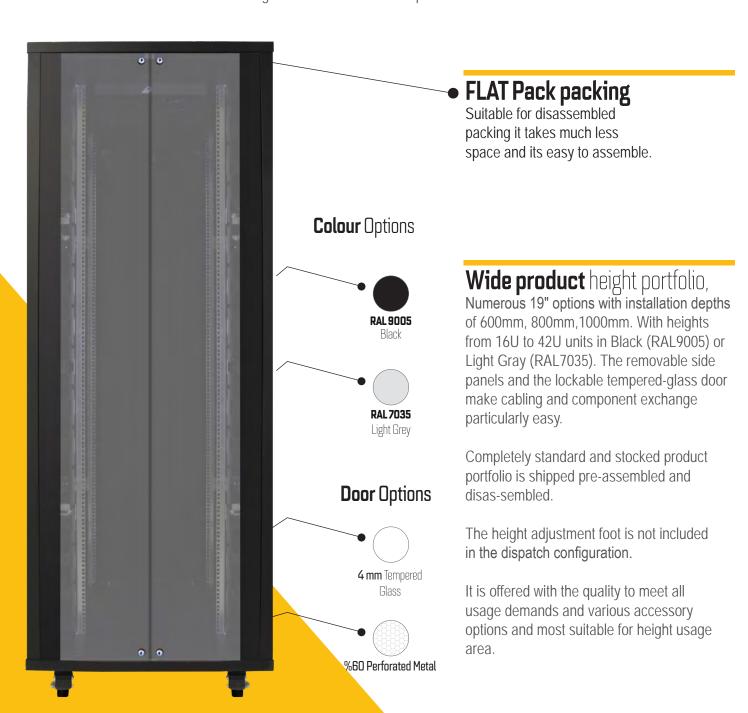













# 19"RACK**CABINET EASY Series**

Free Standing Rack Cabinet

### **DETAILS**

19 "Stylish type modular rack cabinet – All steel construction - Ergonomic design - Carrying frame is steel construction with 1.5mm thickness - Openable and lockable side and back covers - Adjustable rack mounting brackets at the desired level - 800 kg carrying capacity - Easy assembling - An optional fan unit can be installed in the ceiling - he front door is supported by 4 mm tempered glass and sheet frame - Lower and upper cable entries – Standart colors ral 9005, 7035 and 7032 - Dismounted at freight costs: 50% savings, convenient price
















# 19"RACK**CABINET EASY Series**

Free Standing Rack Cabinet

### TECNICHAL DETAILS

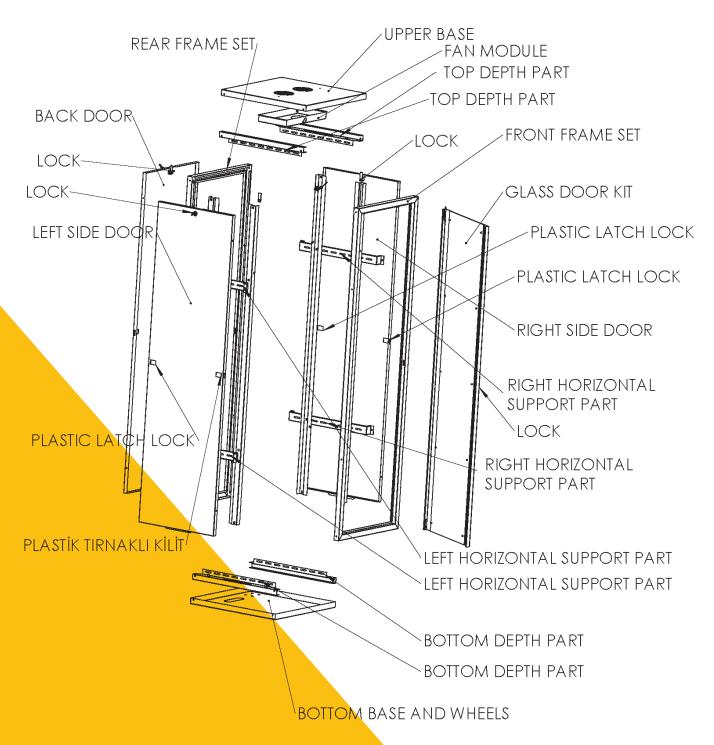

Wide W: **600 mm.**Dept D: **600 - 800 - 1000 mm.**Carrying Capacity: **600 kg.** 









